

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E21B 10/22		A1	(11) International Publication Number: WO 98/15709
			(43) International Publication Date: 16 April 1998 (16.04.98)
(21) International Application Number: PCT/SE97/01670			(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 7 October 1997 (07.10.97)			
(30) Priority Data: 9603663-7 8 October 1996 (08.10.96) SE			
(71) Applicant: SANDVIK AB (publ) [SE/SE]; S-811 81 Sandviken (SE).			
(72) Inventor: BROLUND, Stig-Åke; 16915 Poplar Hill, Houston, TX 77095-4160 (US).			
(74) Agent: CARLSSON, Lars-Åke; Sandvik AB, Patent Dept., S-811 81 Sandviken (SE).			Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: ROCK DRILL BIT AND SEAL MEANS THEREFOR

(57) Abstract

The present invention relates to a rock drill bit for rotary crushing machining of rock. The drill bit comprises legs (10) each carrying a bearing journal (11) provided with bearing surfaces (26, 27) in order to via bearing elements cooperate with races in a thereby rotatable roller cutter equipped with buttons or cutting insert. The leg comprises a tail (30) and seal means (40) intended to counteract entrance of drill cuttings into the bearings, said seal means (40) in addition being intended to retain bearing grease. The seal means (40) is concentrically provided around the bearing journal (11) as well as intended to slide against the roller cutter (12). The bearing journal (11) and the seal means (40) comprise cooperating locking means provided to counteract rotation of the seal means relative to the bearing journal. The invention also relates to a seal means for a rock drill bit.

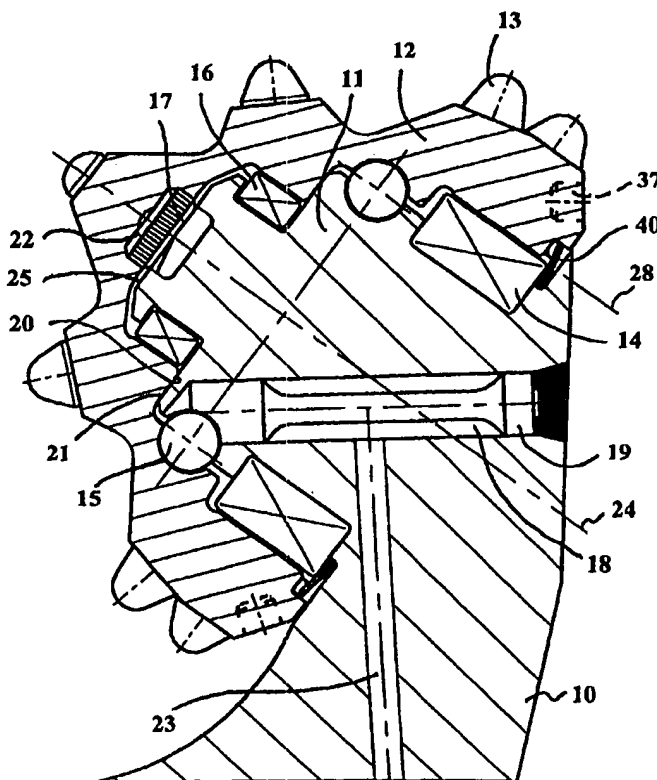

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

ROCK DRILL BIT AND SEAL MEANS THEREFOR5 Background of the invention

The present invention relates to a rock drill bit for rotary crushing machining of rock, including at least a leg carrying a bearing journal provided with bearing surfaces in order to cooperate with races via bearing elements in a thereby rotatable roller cutter equipped with crushing organ, said leg comprising a tail and seal
10 means intended to counteract entrance of drill cuttings into the bearings, said seal means furthermore being intended to retain bearing grease, said seal means being concentrically provided around the bearing journal and being intended to slide against the roller cutter.

15 Prior art

Through US-A-5,295,549 a rotary drill bit of the above mentioned type is previously known. The known tool comprises an axially movable seal, having two metallic rings sealed against the roller cutter and the bearing journal via radially compressed rubber rings. The metallic rings rotate relative to each other and abut against each
20 other via polished abutment surfaces. The known tool has five possible places for leakage of drill cuttings to the bearings. Furthermore, the known seal is troublesome to assemble since it contains a plurality of components. In addition oblique positioning of the abutment surfaces is risked since the seal does not have any rebound in the axial direction between the leg and the roller cutter. In addition
25 US-A-3,663,073; US-A-4,560,175 and US-A-4,772,404 disclose seals that are held by friction and/or by gluing. In US-A-3,489,421 the seal is press fitted about the journal and deformed after positioning for retaining the position of the seal.

Objects of the invention

One object of the present invention is to provide a rotary drilling bit at which life-span of the bearings may be extended considerably compared to crowns with conventional seal.

- 5 Another object of the present invention is to provide a rotary drilling bit at which mounting of the seal means is simplified considerably compared to crowns with conventional seals.

- 10 Another object of the present invention is to provide a rotary drilling bit and a seal means, which provides for an exact and safe location of the seal means

Another object of the present invention is to provide a sealing ring, which has a good resistance against abrasion.

15 Description of the drawings

These and other objects have been achieved by means of a rock drill bit and a sealing ring according to the features and characteristics laid down in the subsequent claims with reference to the drawings, wherein:

- 20 Fig. 1A shows a leg and a roller cutter of a rotary drilling bit according to the present invention, in cross section; Fig. 1B shows an enlarged part of the rotary drilling bit according to Fig. 1A; Fig. 2 shows the end of the leg in a side view, partly in cross section; Fig. 3 shows the end of the leg partly in cross section according to line III-III in Fig. 2; Fig. 4 shows a sealing ring according to the present
25 invention, in plan view; Fig. 5 shows the sealing ring in cross section according to line V-V in Fig. 4; Fig. 6 shows the sealing ring in an enlarged cross section according to line VI-VI in Fig. 4 and Fig. 7 shows the sealing ring in an enlarged cross section according to line VII-VII in Fig. 4.

30 Detailed description of the invention

With reference to Figs. 1A and 1B is shown a rock drill bit according to the present invention, for rotary crushing drilling of rock, a so called rotary drill bit. The drill bit preferably comprises three legs, whereof a sectioned leg 10 is shown. A bearing journal 11 is formed on the leg. In certain designs of drill bits it is possible to provide only one or two legs. On each bearing journal is a roller cutter 12 provided with buttons 13, rotatably journaled by a cylinder bearing 14, a system of roller bearings 15, a radial bearing 16 as well as an axial bearing 17. The buttons can alternatively be replaced of by other crushing organs, such as chisels or teeth integrated with the roller cutter. The legs 11 are evenly distributed around the circumference of the drill bit with 120° partition. For the adoption of roller bearing balls 15 the bearing journal 11 is provided with a channel 18, in which a peg 19 is received in order to retain the separate balls 15. The cylindrical cylinder bearing 14 receives a large part of the force of reaction from the rock, while the principal task of the roller bearing 15 is to retain the roller cutter 12 on the leg 11. The roller cutter has a shoulder 20 that is brought against a collar 21 on the leg for taking up axial forces, which are not received by the cooperation of a support surface 22 with the axial end surface 25 of the shank. The above mentioned bearings are sealed and lubricated by a lubricating system integrated with the drill bit. The lubricating system is connected with the bearing system by means of the channel 23. Instead of the cylinder bearing 14 a slide bearing can be arranged substantially at the corresponding position. The bearing journal 11 has a central line 24 around which the roller cutter 12 and the bearings 14, 15 rotate.

The cylinder bearings 14 rotate along races 26 and the balls 14 rotate in roller bearing races 27, Fig. 2. The balls preferably have bigger diameter than the cylinder bearings 14, wherein the radially extreme point of the cylinder bearings touch a line 28, parallel with line 24. The tail 30, according to Fig. 1B, comprises a jacket surface 31, a tail surface or tip 32 and an axially inner surface or end surface 33, which is connected to an active axial stop surface 34 for the bearing 14. The tip 32 is formed at the intersection between the jacket surface 31 and the end surface 33. Gage inserts 37 are provided generally in the jacket surface for retaining the

diameter of the hole and for counteracting erosion of the steel material of the roller cutter.

5 A seal means 40 is inserted between the roller cutter 12 and the end surface 33 of the leg and is intended to prevent drill cuttings and other impurities from enter into the bearing system. Furthermore, the seal means 40 is intended to retain bearing grease in the bearing system. The seal means 40 is concentrically provided around the bearing journal 11 and is intended to slide against the roller cutter 12. The seal means 40 is more closely shown in Figs. 4 - 7. The seal means consists of an
10 annular one-piece unit consisting of a relatively flexible material 41, such as rubber, and a core or a relatively rigid material 42, such as spring steel. The flexible material is in non-rotational alliance with that rigid material via curing for example. The rigid material 42 is formed as a belleville washer or a cup spring, i.e. it has the shape of a circular ring but where the inner diameter is separated in plane from the
15 outer diameter, for allowing rebound in the axial direction. The rigid material 42 is substantially enclosed by the flexible material 41, wherein at least two surfaces 43, 44 of the seal means are provided as abutment surfaces. A first abutment surface 43 is provided in a plane p and a second abutment surface 44 is provided parallel with this plane, at a distance L. The first abutment surface 43 will be glued to the end
20 surface 33 of the leg, radially inside the line 28. The first abutment surface 43 perpendicularly connects to a third surface 45, which can be glued to a against surface 35 perpendicular to the first abutment surface 43 and provided between the surfaces 33 and 34. The second abutment surface 44 is polished in order to slide easily relatively to a sealing surface 36, provided in the roller cutter 12
25 perpendicularly to the line 28 and parallel with the end surface 33. The second abutment surface 44 is provided radially outside the line 28. The seal means 40 is provided in axial the direction at both sides of the innermost end surface of the bearing 14. The seal means 40 forms a gap with a surface 38 in the roller cutter to release grease in case the inner pressure in the bearing system becomes great.

The seal means 40 and the bearing journal 11 comprise cooperating locking means 46, 47 and 48, 49, respectively, provided to counteract rotation of the seal means relative to the bearing journal. The locking means 46-49 consist of local diminishing or increasing diameters and preferably comprise concave and convex substantially complementary surfaces provided diametrically opposite each other around the roller cutter axis 24 of rotation. The geometries of the complementary surfaces provides for a simple, exact and safe location of the seal means 40. The bearing journal has a collar 50 at the transition to the leg 10, which collar is defined by the perpendicular surfaces 34 and 35. The collar has a bigger diameter than the leg and has a somewhat bigger thickness in axial direction than the connected portion of the seal means. The collar is most simple provided with circular concave recess 48, 49, the radii center of which are arranged radially outside the collar. It follows thereof that the seal means are arranged with circular convex tongues or projections 46, 47, the radii center of which likewise are arranged radially outside the seal means. The locking means 46, 47 of the seal means 40 substantially extend in the plane P and are provided radially inside the line 28. The locking means 46-49 are provided axially outside the end surface 33 of the leg.

By means of a rock drill bit and a sealing ring according to the present invention the life-span of the bearings can be extended and the mounting is simplified considerably compared to drill bits with conventional seals.

The invention is in no manner limited to the above described embodiments. For example the number of locking means may vary and the shape of the locking means may be polygonal, elliptical, or similar. In addition, the collar may be arranged with convex locking means while the seal means is provided with concave locking means, also if this configuration impairs the manufacture of the bearing journal of the drill bit. Also in other aspects the invention can be freely varied within the scope of the appended claims.

Claims

1. A rock drill bit for rotary crushing machining of rock, including at least one leg
5 (10) carrying a bearing journal (11) provided with bearing surfaces (26,27,34) in
order to via bearing element (14,15) cooperate with races in a thereby rotatable
roller cutter (12) equipped with crushing organs (13), said leg comprising a tail (30)
and seal means (40) intended to counteract entrance of drill cuttings into the
bearings, said the seal means (40) in addition being intended to retain bearing
10 grease, said seal means (40) being concentrically provided around the bearing
journal (11) and comprising locking means (46,47) provided to counteract rotation
of the seal means relative to the bearing journal,
c h a r a c t e r i z e d i n that the seal means (40) is a one-piece unit and is
attached via a first surface (43) to an end surface (33) on the leg (10) and that the
15 seal means (40) is intended to slide against the roller cutter (12) via a second
surface (44) and that the locking means (46-49) is provided on the bearing journal
(11) and on the seal means (40) and that the cooperating locking means comprise
concave and convex complementary surfaces (46-49).
- 20 2. Rock drill bit according to claim 1,
c h a r a c t e r i z e d i n that the locking means (46-49) is provided axially outside
the end surface (33) of the leg and that the seal means (40) is glued against the end
surface (33) of the leg.
- 25 3. Rock drill bit according to claims 1 or 2,
c h a r a c t e r i z e d i n that the seal means (40) is provided to rebound in the
axial direction of the bearing journal and that the complementary surfaces (46-49)
are provided diametrically opposite each other around the roller cutter axis (24) of
rotation.
- 30 4. Rock drill bit according to anyone of the claims 1-3,

characterized in that the seal means (40) consists of an ring comprising of a relatively flexible material (41), such as rubber, and a relatively rigid material (42), such as spring steel, said flexible material being in non-rotational alliance via curing for example to the rigid material and that the rigid material (42) has the shape of a circular ring where the inner diameter is separated in plane from the outer diameter.

5. Rock drill bit according to claim 4,
characterized in that the rigid material (42) is substantially enclosed by the flexible material (41), wherein at least two surfaces (43,44) of the flexible material are provided as abutment surfaces against the end surface (33) of the leg and against a sealing surface (36) of the roller cutter, respectively.

6. Rock drill bit according to claim 5,
characterized in that a first abutment surface (43) is provided in a plane (P) and a second abutment surface (44) is provided parallel with this plane, at a distance (L) therefrom, wherein the first abutment surface (43) is provided to be glued to the end surface (33), /wherein the second abutment surface (44) is polished in order to easy slide relatively a sealing surface (36), provided in the roller cutter (12) substantially parallel to the end surface (33).

7. Seal means for a rock drill bit of the type which are indicated in the claims 1-6,
characterized in that the seal means (40) consists of a one-piece unit and that the seal means (40) comprises locking means (46,47) consisting of local diminishing or increasing internal diameters, wherein the locking means are provided to counteract rotation of the seal means at application and that the locking means comprise concave or convex complementary surfaces (46,47).

8. Seal means according to claim 7,
characterized in that it is provided to be fastened by gluing in connection with mounting.

9. Seal means according to claims 7 or 8,
c h a r a c t e r i z e d i n that the seal means (40) is provided to rebound in the
axial direction and that the complementary surfaces (46,47) are provided
5 diametrically opposite each other around the center axis (24) of the seal means (40).

10. Seal means according to anyone of the claims 7-9,
c h a r a c t e r i z e d i n that the seal means (40) consists of an ring consisting of a
relatively flexible material (41), such as rubber, and a relatively rigid material (42),
10 such as spring steel, said flexible material being in non-rotational alliance via curing
for example to the rigid material and that the rigid material (42) has the shape of a
circular ring but where the inner diameter is separated in plane from the outer
diameter and that the rigid material (42) is substantially enclosed by the flexible
material (41) and that a first abutment surface (43) is provided in a plane (P) and a
15 second abutment surface (44) is provided parallel with this plane, at a distance (L)
therefrom, wherein the first abutment surface (43) is provided to be glued and the
second abutment surface (44) is polished.

1/4

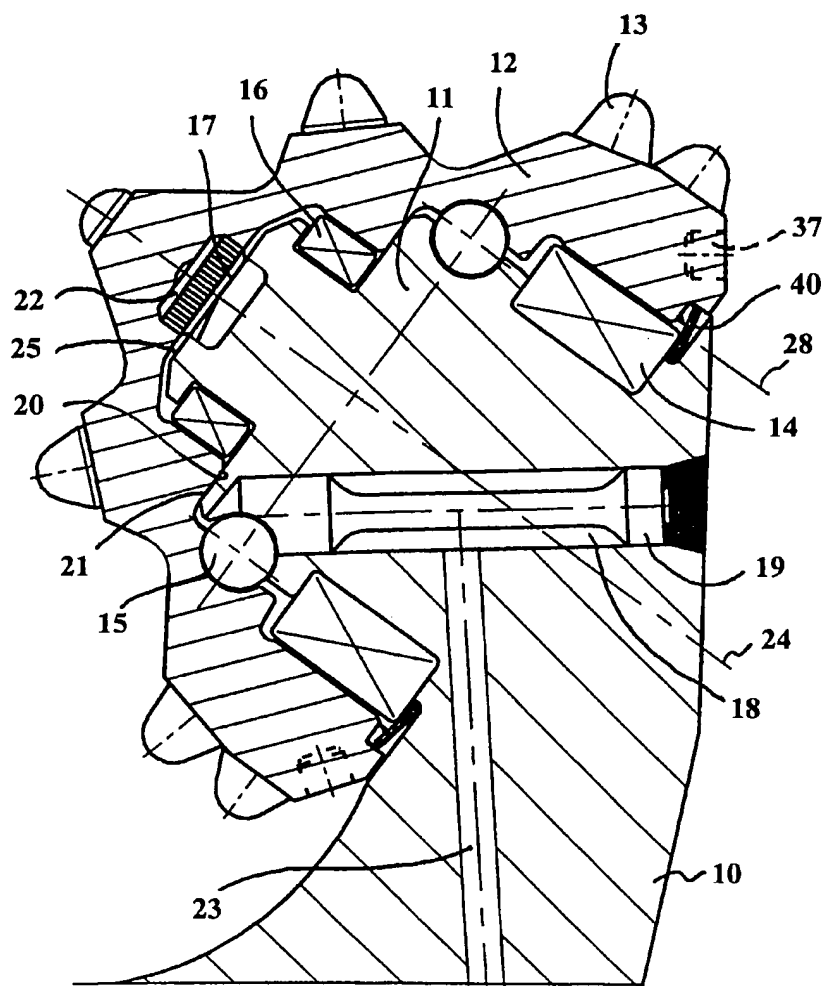


FIG. 1A

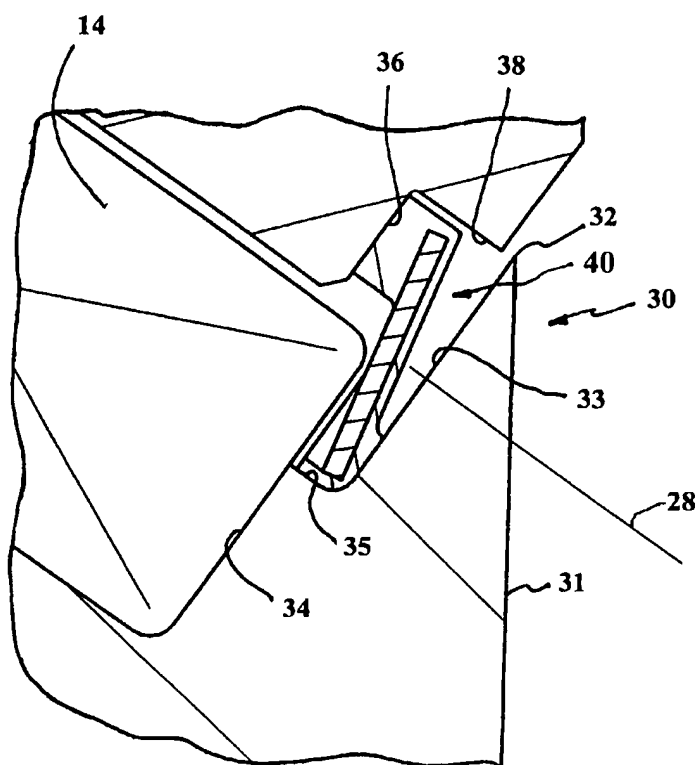


FIG. 1B

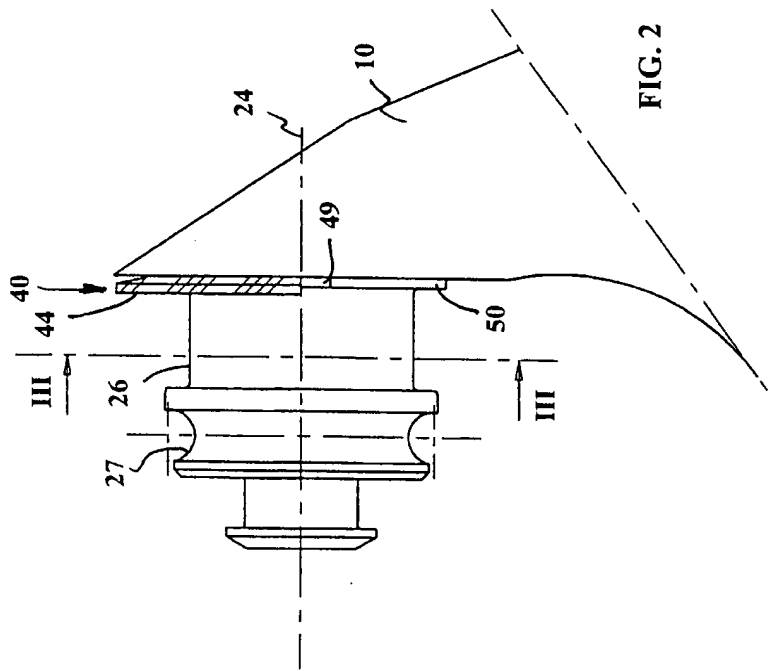
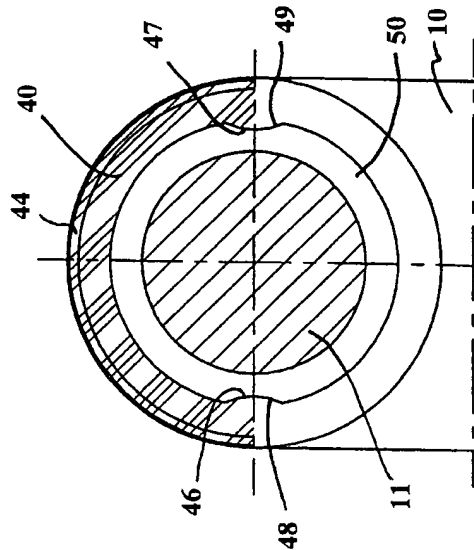


FIG. 3



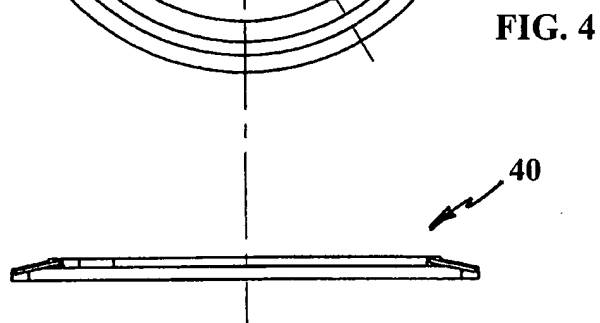
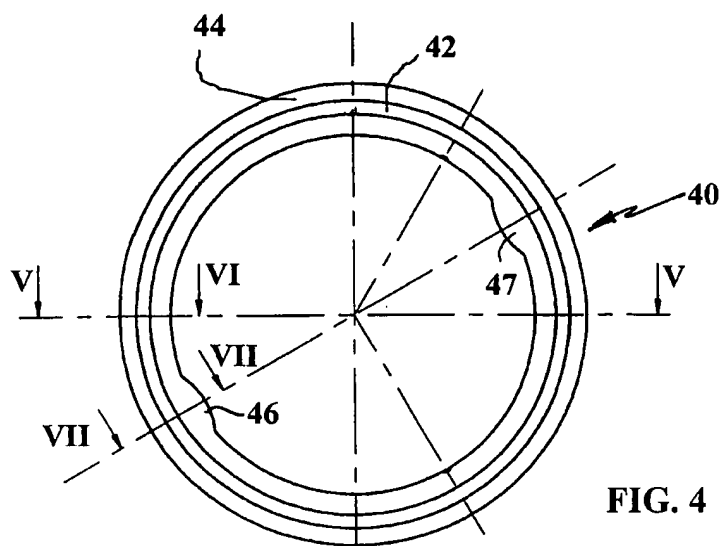


FIG. 5

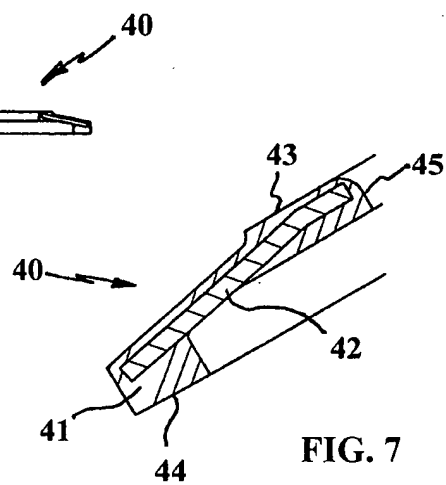


FIG. 7

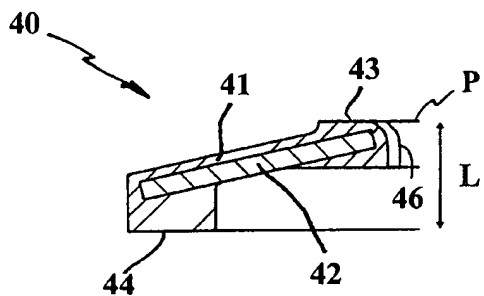


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 97/01670

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: E21B 10/22 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: E21B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPODOC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3489421 A (W.J. NEILSON), 13 January 1970 (13.01.70) --	1-10
A	US 5295549 A (G.E. DOLEZAL ET AL), 22 March 1994 (22.03.94) --	1-10
A	US 3663073 A (C.L. BRONSON), 16 May 1972 (16.05.72) --	1-10
A	US 4560175 A (N.J. KAR ET AL), 24 December 1985 (24.12.85) --	1-10
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search		Date of mailing of the international search report
9 January 1998		03 -02- 1998
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Christer Bäcknert Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01670

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4722404 A (R.F. EVANS), 2 February 1988 (02.02.88) -- -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/97

International application No.

PCT/SE 97/01670

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3489421 A	13/01/70	DE 1675388 A FR 1556084 A GB 1210874 A NL 6802981 A	21/01/71 31/01/69 04/11/70 24/09/68
US 5295549 A	22/03/94	AU 5749694 A WO 9413927 A	04/07/94 23/06/94
US 3663073 A	16/05/72	NONE	
US 4560175 A	24/12/85	DE 3521440 A FR 2573123 A GB 2161189 A,B JP 61075192 A US 4632401 A	06/02/86 16/05/86 08/01/86 17/04/86 30/12/86
US 4722404 A	02/02/88	NONE	